


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm		
NAME: 2'X2' LED Panel	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.56*0.56	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 125.63 lm/W			
MODEL	CT-D02036PL	I _{max} (cd)	1509	S/MH (C0/180)	1.25
NOMINAL POWER (W)	36	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4395.8	η UP, DN (C0-180)	0.0, 49.4
NOMINAL FLUX (lm)	4395.83	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.5
LAMPS INSIDE	1	η up (%)	0.1	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)		η down (%)	99.9	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

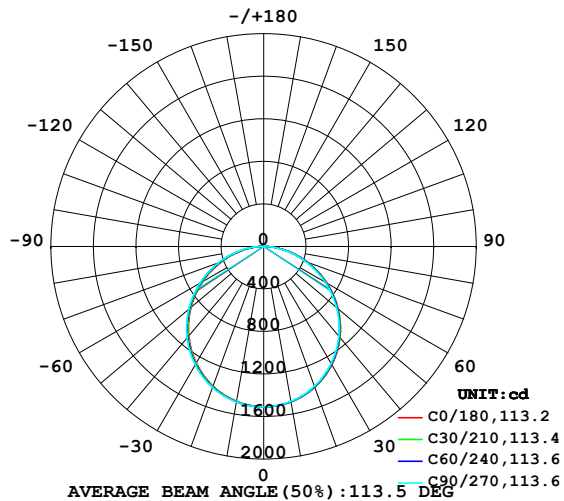

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

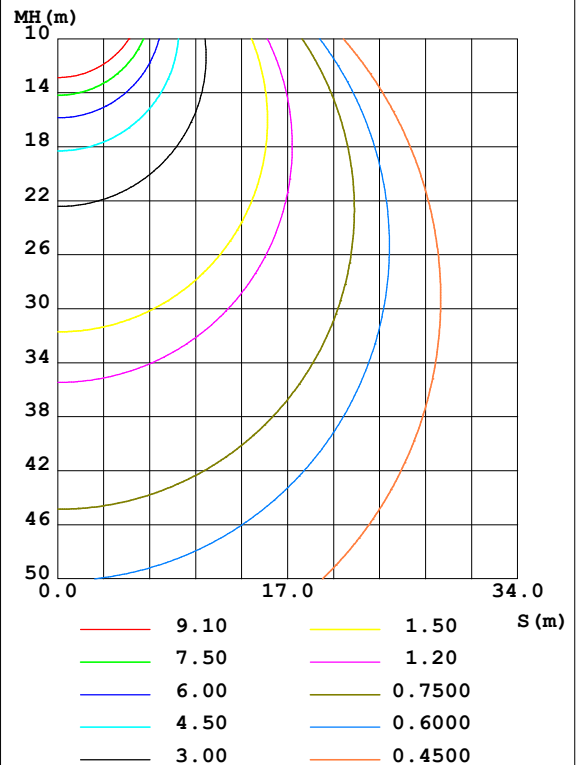

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Paul
 Test Date: 2017-02-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.364
 Humidity: 65.0%
 Test Distance: 2.900m [K=0.8389]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1484	1482	1479	1477	1479	1482	1485	1486	0- 10	142.7	142.7	3.25,3.25
20	1408	1404	1399	1394	1397	1404	1410	1412	10- 20	409.0	551.7	12.5,12.5
30	1284	1279	1270	1263	1268	1278	1287	1289	20- 30	620.3	1172	26.7,26.7
40	1117	1110	1100	1091	1097	1110	1121	1124	30- 40	749.2	1921	43.7,43.7
50	914.4	907.0	895.1	885.1	892.7	907.1	920.1	923.4	40- 50	779.7	2701	61.4,61.4
60	685.8	676.8	664.6	654.7	662.7	678.9	693.4	696.0	50- 60	709.2	3410	77.6,77.6
70	443.0	434.5	422.2	412.2	421.4	438.4	452.6	454.6	60- 70	550.4	3961	90.1,90.1
80	205.4	195.3	184.2	179.0	188.7	202.3	215.1	218.1	70- 80	332.5	4293	97.7,97.7
90	6.878	2.483	1.682	2.421	0.3915	0.5713	3.290	4.309	80- 90	98.91	4392	99.9,99.9
100	0.2948	0.3044	0.3145	0.3164	0.5397	0.5354	0.5162	0.5085	90-100	0.4930	4392	99.9,99.9
110	0.4187	0.4202	0.4358	0.4434	0.5788	0.5648	0.5455	0.5496	100-110	0.4883	4393	99.9,99.9
120	0.5364	0.5652	0.6046	0.5777	0.5199	0.5458	0.5379	0.4954	110-120	0.5099	4393	99.9,99.9
130	0.6636	0.7599	0.7845	0.7588	0.6033	0.6347	0.6473	0.5752	120-130	0.5412	4394	100,100
140	0.7310	0.8175	0.8214	0.7719	0.7239	0.7806	0.8030	0.7494	130-140	0.5704	4395	100,100
150	0.6990	0.7588	0.7591	0.6975	0.8447	0.9296	0.9206	0.8698	140-150	0.5084	4395	100,100
160	0.7206	0.8135	0.8145	0.7191	0.8748	0.9666	0.9929	0.9181	150-160	0.3850	4395	100,100
170	0.8166	0.8956	0.9058	0.8005	0.8326	0.9439	0.9973	1.004	160-170	0.2479	4396	100,100
180	0.8306	0.9433	0.9694	0.9326	0.8330	0.9335	0.9773	0.9758	170-180	0.0885	4396	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 2313.7 lm

%lum = 52.6%

%lamp = 52.6%

Conical surface Flux(120deg): 3410.2 lm

%lum = 77.6%


%lamp = 77.6%

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Paul
 Test Date:2017-02-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
 Humidity:65.0%
 Test Distance:2.900m [K=0.8389]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm		
NAME: 2'X2' LED Panel	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.56*0.56	Shielding Angle:

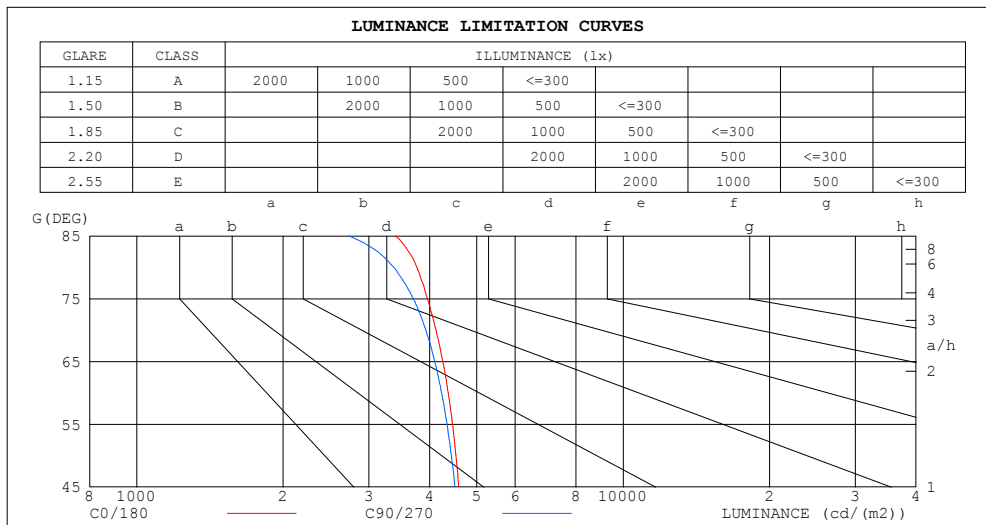

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3399	2726
80	3768	3377
75	3962	3700
70	4125	3931
65	4259	4099
60	4368	4233
55	4458	4344
50	4530	4435
45	4592	4510

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Paul
Test Date:2017-02-22

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
Humidity:65.0%
Test Distance:2.900m [K=0.8389]
Remarks:

WEC AND CCEC

Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm		
NAME: 2'X2' LED Panel	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.56*0.56	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.317	.180	.057	.310	.177	.056	.297	.170	.054	.284	.164	.053	.273	.158	.051		
2.0	.297	.163	.050	.290	.160	.049	.279	.155	.048	.268	.150	.047	.258	.146	.046		
3.0	.274	.146	.044	.268	.144	.043	.258	.140	.042	.248	.136	.042	.239	.132	.041		
4.0	.252	.131	.038	.247	.129	.038	.238	.126	.038	.229	.123	.037	.221	.120	.037		
5.0	.232	.118	.034	.228	.117	.034	.220	.114	.034	.212	.112	.033	.205	.110	.033		
6.0	.215	.108	.031	.211	.107	.031	.204	.105	.030	.197	.103	.030	.191	.100	.030		
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.093	.027		
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025		
9.0	.175	.085	.024	.172	.084	.024	.167	.083	.023	.162	.081	.023	.157	.080	.023		
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.191	.191	.191	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.181	.157	.134	.155	.135	.116	.106	.093	.080	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.098	.149	.114	.085	.102	.079	.059	.059	.046	.035	.019	.015	.011	
3.0	.166	.115	.074	.142	.099	.065	.098	.069	.045	.056	.040	.027	.018	.013	.009	
4.0	.158	.102	.059	.136	.088	.051	.093	.061	.036	.054	.036	.021	.017	.012	.007	
5.0	.151	.091	.048	.129	.079	.041	.089	.055	.029	.052	.032	.017	.017	.011	.006	
6.0	.143	.083	.040	.123	.072	.034	.085	.050	.024	.049	.030	.014	.016	.010	.005	
7.0	.137	.076	.034	.118	.066	.029	.081	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.130	.070	.029	.112	.061	.025	.077	.043	.018	.045	.025	.011	.015	.008	.004	
9.0	.124	.065	.026	.107	.057	.022	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.118	.061	.023	.102	.053	.020	.071	.037	.014	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Paul
Test Date:2017-02-22

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
Humidity:65.0%
Test Distance:2.900m [K=0.8389]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm											
NAME: 2'X2' LED Panel						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: EVERFINE						SUR.:0.56*0.56			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		12.9	14.5	13.2	14.7	14.9	12.8	14.4	13.1	14.6	14.8
	3H	14.5	16.0	14.8	16.2	16.4	14.4	15.8	14.7	16.0	16.3
	4H	15.2	16.6	15.5	16.8	17.1	15.0	16.4	15.3	16.6	16.9
	6H	15.8	17.0	16.1	17.3	17.6	15.5	16.8	15.8	17.0	17.3
	8H	15.9	17.2	16.3	17.5	17.7	15.6	16.9	16.0	17.2	17.4
	12H	16.1	17.2	16.4	17.5	17.8	15.7	16.9	16.1	17.2	17.5
4H	2H	13.6	14.9	13.9	15.2	15.4	13.5	14.8	13.8	15.1	15.3
	3H	15.4	16.5	15.7	16.8	17.1	15.2	16.4	15.6	16.7	17.0
	4H	16.2	17.3	16.5	17.6	17.9	16.0	17.1	16.4	17.4	17.7
	6H	16.8	17.8	17.2	18.2	18.5	16.6	17.6	17.0	17.9	18.3
	8H	17.1	18.0	17.5	18.3	18.7	16.8	17.7	17.2	18.1	18.4
	12H	17.3	18.1	17.7	18.5	18.9	16.9	17.7	17.3	18.1	18.5
8H	4H	16.5	17.4	16.9	17.7	18.1	16.3	17.2	16.7	17.6	18.0
	6H	17.3	18.0	17.7	18.4	18.9	17.1	17.8	17.5	18.2	18.6
	8H	17.6	18.3	18.1	18.7	19.2	17.3	18.0	17.8	18.4	18.9
	12H	17.9	18.5	18.4	18.9	19.4	17.6	18.1	18.0	18.6	19.1
12H	4H	16.5	17.3	16.9	17.7	18.1	16.3	17.1	16.7	17.5	17.9
	6H	17.3	18.0	17.8	18.4	18.9	17.1	17.8	17.6	18.2	18.7
	8H	17.7	18.3	18.2	18.8	19.2	17.5	18.0	17.9	18.5	19.0
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117, 4396 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 5.1$)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Paul
 Test Date:2017-02-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
 Humidity:65.0%
 Test Distance:2.900m [K=0.8389]
 Remarks:


```

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
Humidity:65.0%
Test Distance:2.900m [K=0.8389]
Remarks:

```

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm		
NAME: 2'X2' LED Panel	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.56*0.56	Shielding Angle:

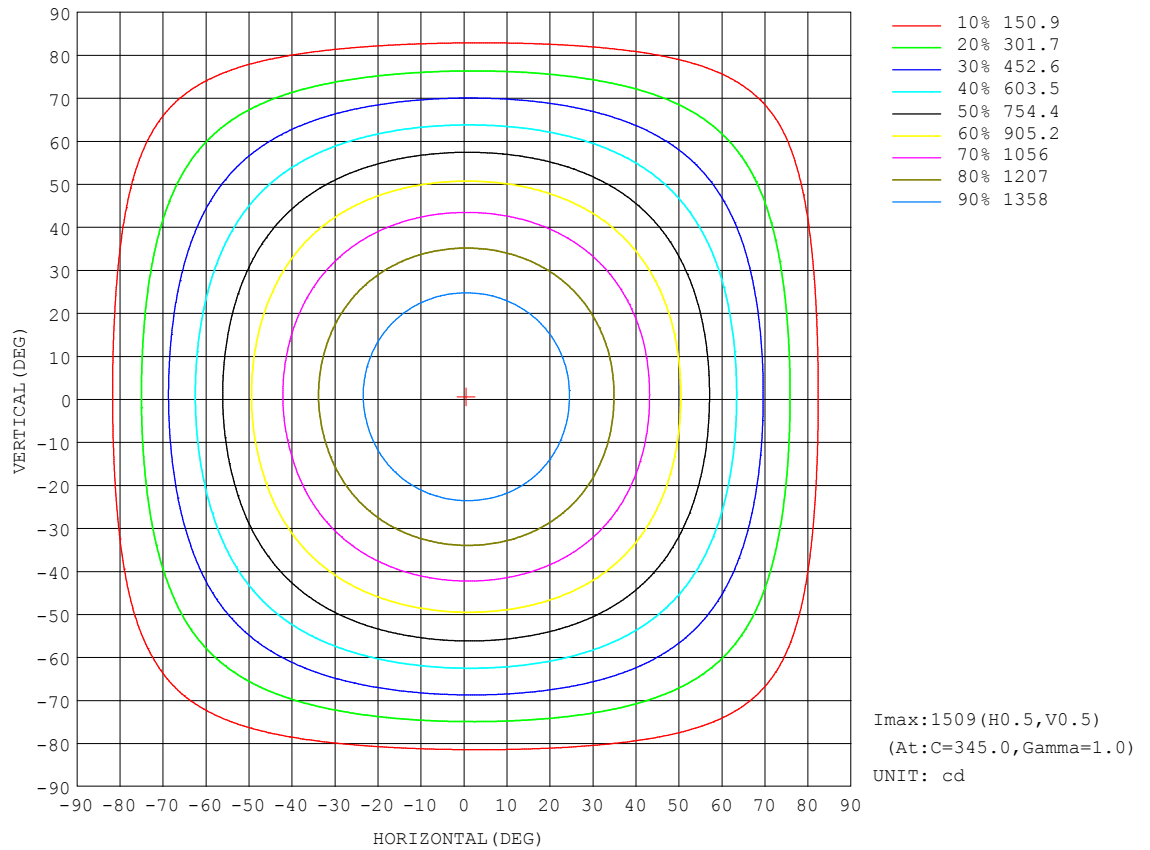


C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Paul
Test Date:2017-02-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
Humidity:65.0%
Test Distance:2.900m [K=0.8389]
Remarks:

AAI Figure

Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm		
NAME: 2'X2' LED Panel	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.56*0.56	Shielding Angle:

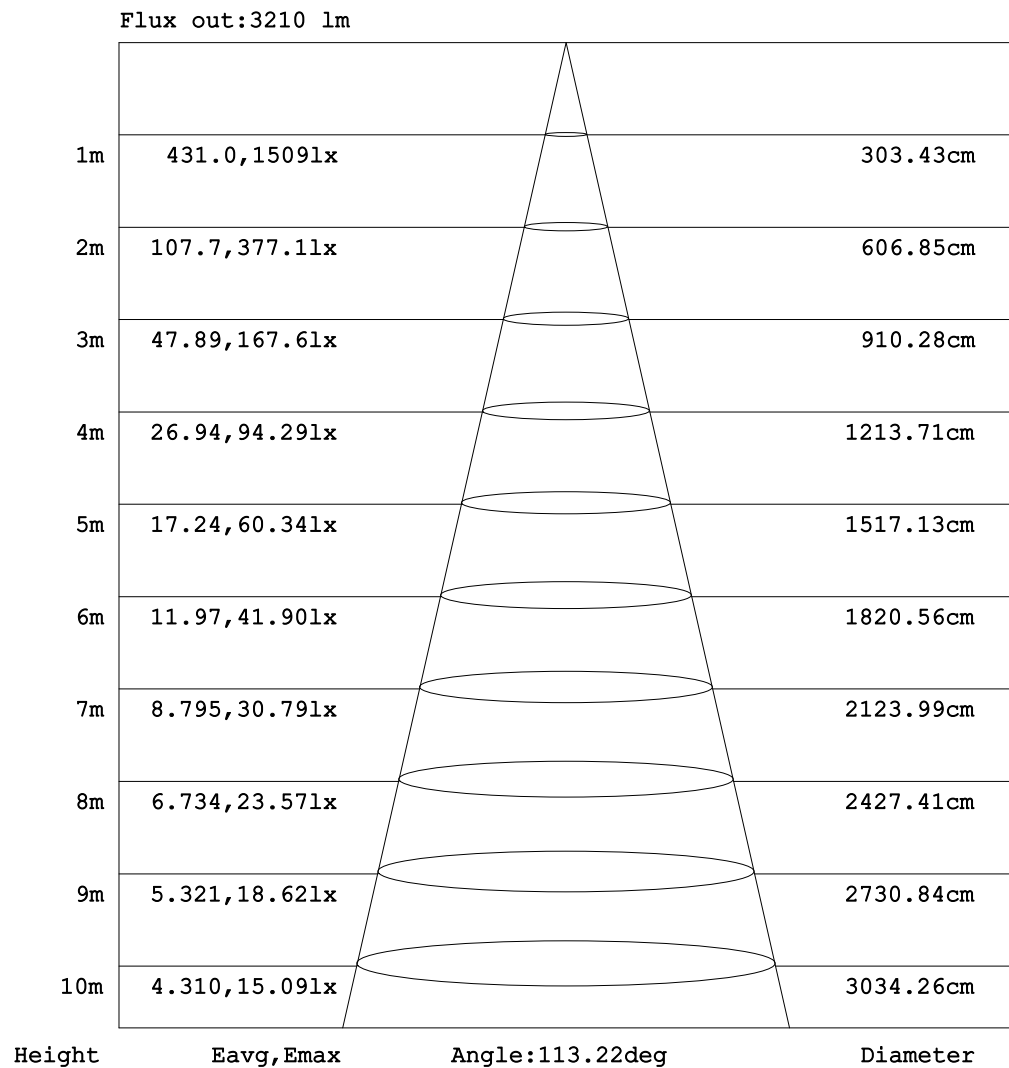


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: Paul
 Test Date: 2017-02-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.364
 Humidity: 65.0%
 Test Distance: 2.900m [K=0.8389]
 Remarks:

Planar Illuminance Curve

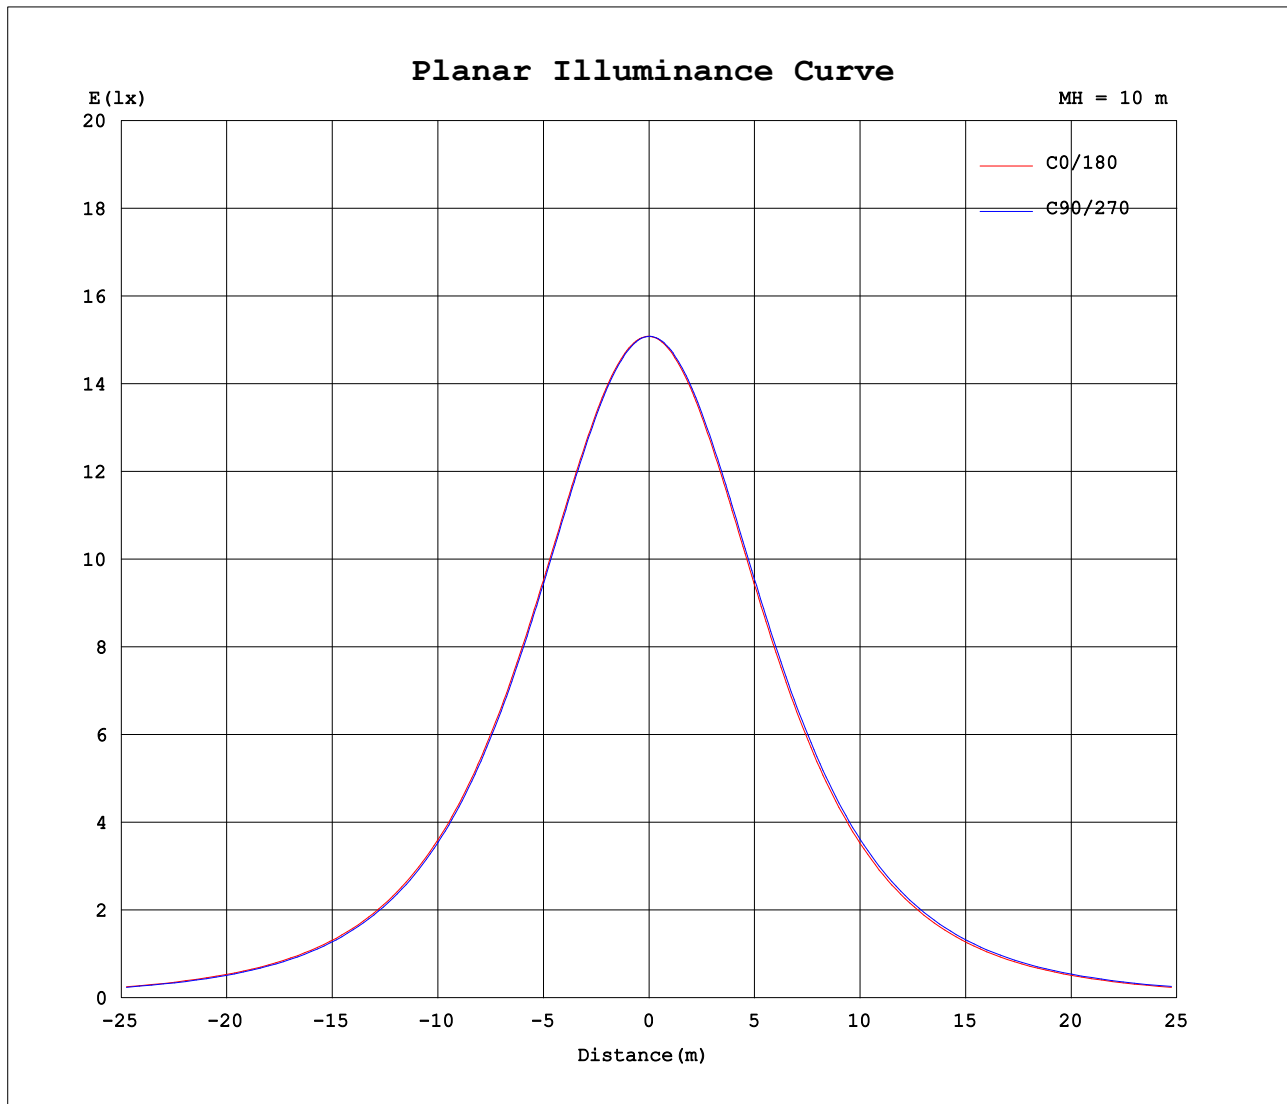

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: Paul
Test Date: 2017-02-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.0.364
Humidity: 65.0%
Test Distance: 2.900m [K=0.8389]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm		
NAME: 2'X2' LED Panel	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.56*0.56	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1508	1508	1508	1508	1508	1508	1508	1508	1508	1508	1509	1509	1508	1508	1508	1508	1508	1508	1508
5	1503	1503	1502	1502	1501	1501	1500	1500	1500	1500	1500	1500	1500	1501	1501	1502	1502	1503	1503
10	1484	1484	1483	1482	1481	1480	1479	1478	1478	1477	1477	1478	1479	1480	1481	1482	1483	1484	1485
15	1453	1452	1451	1450	1448	1446	1445	1444	1443	1442	1442	1442	1444	1446	1447	1449	1451	1453	1454
20	1408	1407	1406	1404	1403	1400	1399	1397	1395	1394	1394	1394	1397	1399	1401	1404	1406	1409	1410
25	1352	1350	1349	1347	1345	1343	1340	1338	1336	1334	1334	1334	1338	1341	1343	1347	1350	1352	1354
30	1284	1282	1281	1279	1276	1273	1270	1267	1265	1263	1263	1264	1268	1271	1274	1278	1282	1285	1287
35	1205	1204	1202	1199	1196	1193	1190	1187	1184	1182	1181	1182	1187	1190	1194	1199	1203	1206	1209
40	1117	1115	1113	1110	1107	1104	1100	1096	1093	1091	1090	1091	1097	1101	1105	1110	1114	1118	1121
45	1020	1018	1015	1012	1009	1005	1001	998	994	992	991	992	999	1002	1007	1012	1017	1021	1024
50	914	913	910	907	903	899	895	891	888	885	885	885	893	897	902	907	912	917	920
55	803	801	798	795	791	786	782	778	775	773	772	773	780	784	790	795	801	806	809
60	686	684	681	677	673	669	665	661	657	655	654	655	663	668	673	679	685	689	693
65	565	563	560	556	553	548	544	540	536	534	532	534	543	547	553	559	565	570	573
70	443	440	438	435	430	426	422	418	415	412	411	412	421	426	432	438	444	449	453
75	322	319	317	313	309	304	301	298	295	293	292	293	302	307	313	319	324	329	333
80	205	203	199	195	191	187	184	182	180	179	179	179	189	193	198	202	207	211	215
85	93.0	90.3	87.6	85.1	81.1	77.4	74.6	72.3	70.8	70.9	71.6	72.9	81.5	84.3	87.6	91.6	95.7	99.4	103
90	6.88	4.69	3.69	2.48	4.51	2.24	1.68	2.68	2.38	2.42	2.63	1.46	0.39	0.39	0.40	0.57	1.30	2.37	3.29
95	0.25	0.25	0.26	0.26	0.26	0.26	0.27	0.27	0.27	0.27	0.26	0.26	0.47	0.47	0.47	0.46	0.46	0.45	0.45
100	0.29	0.30	0.30	0.30	0.31	0.32	0.31	0.31	0.31	0.32	0.32	0.31	0.54	0.54	0.54	0.54	0.53	0.52	0.52
105	0.36	0.36	0.35	0.37	0.37	0.38	0.38	0.37	0.37	0.38	0.38	0.38	0.59	0.58	0.58	0.58	0.58	0.57	0.56
110	0.42	0.41	0.40	0.42	0.43	0.44	0.44	0.42	0.42	0.44	0.44	0.43	0.58	0.57	0.57	0.56	0.57	0.56	0.55
115	0.48	0.47	0.46	0.49	0.50	0.53	0.50	0.49	0.50	0.51	0.49	0.49	0.55	0.54	0.54	0.54	0.55	0.55	0.53
120	0.54	0.54	0.53	0.57	0.60	0.63	0.60	0.59	0.58	0.58	0.55	0.56	0.52	0.52	0.53	0.55	0.57	0.56	0.54
125	0.60	0.59	0.63	0.68	0.70	0.72	0.69	0.67	0.67	0.67	0.62	0.63	0.53	0.53	0.54	0.57	0.60	0.60	0.57
130	0.66	0.68	0.69	0.76	0.80	0.79	0.78	0.74	0.73	0.76	0.68	0.70	0.60	0.59	0.60	0.63	0.66	0.67	0.65
135	0.72	0.73	0.77	0.82	0.84	0.85	0.83	0.80	0.78	0.79	0.74	0.77	0.67	0.68	0.70	0.72	0.73	0.74	0.73
140	0.73	0.76	0.78	0.82	0.85	0.86	0.82	0.80	0.79	0.77	0.76	0.79	0.72	0.75	0.77	0.78	0.79	0.81	0.80
145	0.75	0.77	0.79	0.79	0.81	0.82	0.81	0.78	0.75	0.77	0.78	0.79	0.80	0.83	0.85	0.83	0.85	0.87	0.87
150	0.70	0.70	0.75	0.76	0.77	0.78	0.76	0.73	0.70	0.70	0.70	0.71	0.84	0.86	0.89	0.93	0.93	0.92	0.92
155	0.70	0.72	0.76	0.79	0.78	0.79	0.77	0.78	0.70	0.69	0.71	0.71	0.86	0.87	0.91	0.98	0.97	0.96	0.95
160	0.72	0.77	0.82	0.81	0.81	0.82	0.81	0.79	0.74	0.72	0.72	0.72	0.87	0.88	0.91	0.97	1.01	1.01	0.99
165	0.78	0.83	0.86	0.86	0.85	0.86	0.86	0.84	0.79	0.76	0.75	0.75	0.86	0.85	0.89	0.93	0.97	0.97	0.97
170	0.82	0.88	0.90	0.90	0.90	0.91	0.91	0.91	0.86	0.80	0.82	0.80	0.83	0.84	0.89	0.94	0.97	0.97	1.00
175	0.85	0.92	0.95	0.97	0.97	0.98	0.98	0.96	0.94	0.88	0.90	0.86	0.91	0.91	0.93	0.99	1.02	1.03	1.03
180	0.83	0.90	0.94	0.94	0.97	0.98	0.97	0.97	0.98	0.93	0.88	0.88	0.83	0.84	0.90	0.93	0.94	0.97	0.98

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:Paul
Test Date:2017-02-22

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
Humidity:65.0%
Test Distance:2.900m [K=0.8389]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.2932A P:34.99W PF:0.9941 Freq:60.01Hz Lamp Flux:4395.83x1 lm		
NAME: 2'X2' LED Panel	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: EVERFINE	SUR.:0.56*0.56	Shielding Angle:

Table--2

UNIT: cd

C (DEG) γ (DEG)	285	300	315	330	345														
0	1508	1508	1508	1509	1509														
5	1504	1504	1504	1504	1504														
10	1486	1486	1486	1486	1486														
15	1455	1455	1455	1455	1455														
20	1411	1412	1412	1411	1411														
25	1356	1356	1356	1356	1355														
30	1289	1289	1289	1289	1287														
35	1210	1211	1211	1210	1209														
40	1123	1124	1124	1123	1122														
45	1026	1027	1027	1026	1025														
50	922	923	923	922	921														
55	812	812	812	811	810														
60	695	696	696	695	693														
65	576	576	576	575	573														
70	455	455	455	453	451														
75	335	335	334	333	331														
80	218	219	218	216	214														
85	105	105	105	103	101														
90	3.94	4.54	4.31	4.13	3.34														
95	0.44	0.44	0.44	0.44	0.44														
100	0.51	0.51	0.51	0.51	0.52														
105	0.54	0.55	0.56	0.55	0.57														
110	0.53	0.54	0.55	0.54	0.56														
115	0.51	0.50	0.52	0.51	0.53														
120	0.51	0.49	0.50	0.49	0.50														
125	0.54	0.50	0.52	0.52	0.53														
130	0.61	0.58	0.58	0.59	0.58														
135	0.71	0.68	0.67	0.70	0.68														
140	0.80	0.77	0.75	0.78	0.76														
145	0.88	0.86	0.83	0.86	0.85														
150	0.92	0.92	0.87	0.89	0.86														
155	0.97	0.94	0.88	0.88	0.88														
160	0.98	0.98	0.92	0.92	0.87														
165	0.98	0.98	0.98	0.91	0.89														
170	1.01	1.02	1.00	0.94	0.90														
175	1.04	1.05	1.03	0.96	0.93														
180	0.97	0.97	0.98	0.93	0.88														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:Paul
 Test Date:2017-02-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.0.364
 Humidity:65.0%
 Test Distance:2.900m [K=0.8389]
 Remarks: